

KIMBERLEY


KIMBERLEY ACCESS STAIRS ALUMINIUM - RATED FOR 136 kgs

ACCESS UNUSED STORAGE SPACE
IN YOUR GARAGE ROOF AND
CEILING, ETC.




FEATURES AND BENEFITS:


- ✓ Rails made of heavy duty aluminum extrusions for added strength.
- ✓ Steps riveted to rail with solid aluminum rivets for a secure fit.
- ✓ Aluminum steps are serrated to resist slipping.
- ✓ Power arm hinge features one piece construction, no welded joints.
- ✓ Easily adjustable spring tension.
- ✓ Complete installation kit with simple to understand instructions.
- ✓ Extra corner bracing keeps stairway frame square.
- ✓ Exclusive "EZ - Hang Strap" system for quick and easy installation.

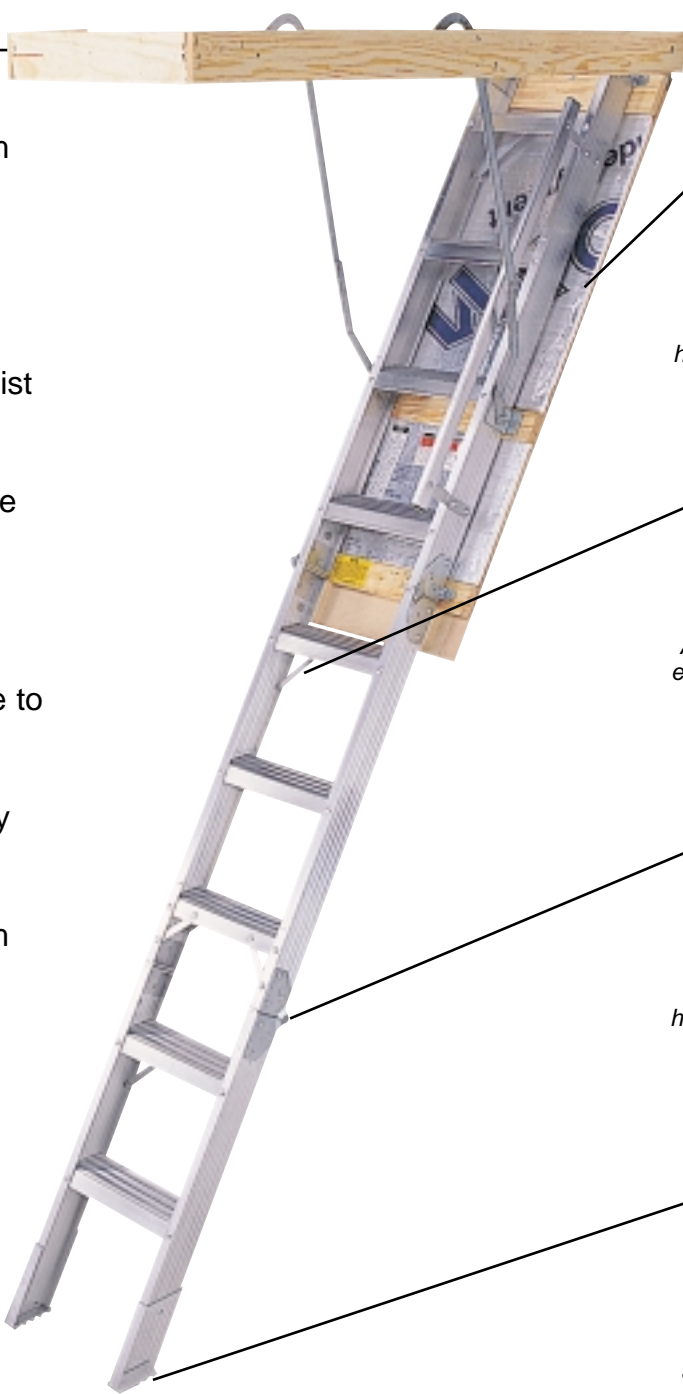


Fully insulated door void helps reduce energy costs



Angle bracing on top of each climbing section for strength and stability




Heavy duty aluminum hinges at rail joints prevent side to side motion



Custom fit with fully adjustable foot assembly

SWING CLEARANCE

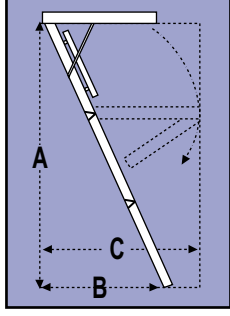

| MODEL | APPROX. OPENING | (A) CEILING HEIGHT RANGE | (B) LANDING SPACE | (C) PROJECTION | STEP WIDTH X LENGTH X DEPTH | SIDE RAIL WIDTH X DEPTH | DOOR PANEL WIDTH X LENGTH |
|--------|-----------------|------------------------------|-------------------|----------------|-----------------------------|-------------------------|---------------------------|
| KASW03 | 570 X 1370 | 2130 to 2665 84" to 105" | 1700 | 1800 | 82 X 316 X 19 | 83 X 19 | 525 X 1327 |
| KASW04 | 570 X 1370 | 2665 to 3048 105" to 120" | 1850 | 2000 | 82 X 316 X 19 | 83 X 19 | 525 X 1327 |
| | | | | | | | |

NB: We reserve the right to alter specifications without notice.

KIMBERLEY



KIMBERLEY ACCESS STAIRS PREMIUM WOOD

ACCESS UNUSED STORAGE SPACE
IN YOUR GARAGE ROOF AND
CEILING, ETC.




FEATURES AND BENEFITS:

- ✓ Easily adjustable spring tension.
- ✓ Power arm hinge features one piece construction, no welded joints.
- ✓ Extra corner bracing keeps stairway frame square.
- ✓ Complete installation kit with simple to understand instructions.
- ✓ Fits standard 600mm ceiling joist centres.
- ✓ Easy to install.
- ✓ Exclusive "EZ-Hang Strap" system for quick and easy installation.
- ✓ Wire rod under each step for strength

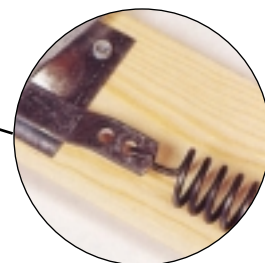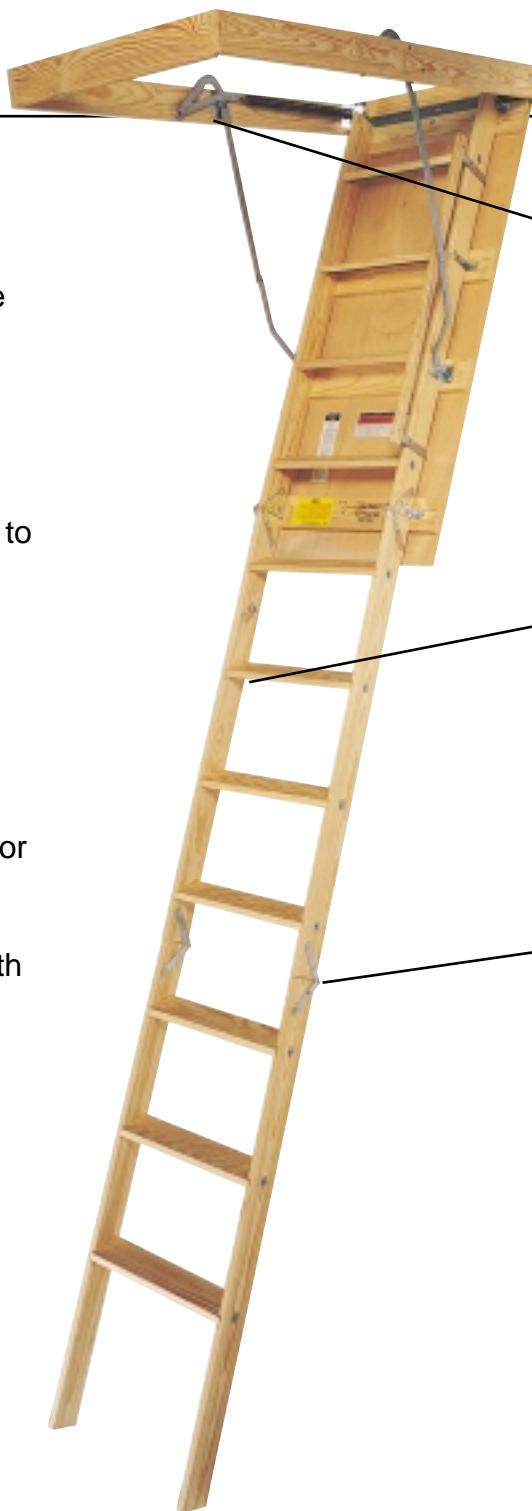

Easily adjustable spring tension

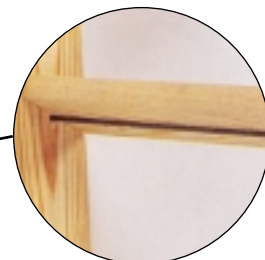

Wire rod under each step for strength




Metal hinges riveted on both sides of rail joints prevent side to side movement



Exclusive "EZ-Hang Strap" system for quick and easy installation

SWING CLEARANCE



| MODEL | APPROX. OPENING | (A) CEILING HEIGHT RANGE | (B) LANDING SPACE | (C) PROJECTION | STEP WIDTH X LENGTH X DEPTH | SIDE RAIL WIDTH X DEPTH | DOOR PANEL WIDTH X LENGTH |
|--------|-----------------|------------------------------|-------------------|----------------|-----------------------------|-------------------------|---------------------------|
| KASW01 | 570 X 1370 | 2130 to 2665 84" to 105" | 1700 | 1800 | 84 X 316 X 19 | 87 X 19 | 525 X 1327 |
| KASW02 | 570 X 1370 | 2665 to 3048 105" to 120" | 1850 | 2000 | 84 X 316 X 19 | 87 X 19 | 525 X 1327 |

NB: We reserve the right to alter specifications without notice.

KIMBERLEY PRODUCTS PTY LTD ACN 004 518 012

Free Call: 1800 225 377

EMAIL: kimprod@kimprod.com.au

www.kimprod.com.au